

Healthcare Perforated



- » Lightly textured, bright white finish
- » Good humidity resistance
- » Class C sound absorption
- » Lightweight, easy to handle baseboard
- » Range of edge details
- » Anti-bacterial, self sterilising finish
- » Can enable compliance with HTM guidelines

MINERAL FIBRE__


+44 (0)1455 618 787
enquiries@burgesscep.com
Brookfield Road, Hinckley LE10 2LL
Verulam Road, Stafford ST16 3EA

WWW.BURGESSCEP.COM


Healthcare Perforated



Healthcare Perforated combines Class C acoustic absorption with a cleanable, anti bacterial surface making it ideal for hospitals and healthcare buildings. The lightweight mineral baseboard is easy to handle and minimises damage whilst the surface inhibits the growth of bacteria, yeast and fungi.

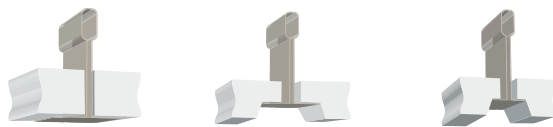

Module Size	Grid Panel	Standard Tegular	Fine Tegular
600x600	B5721	A5723	A5721
1200x600	B5722	-	-

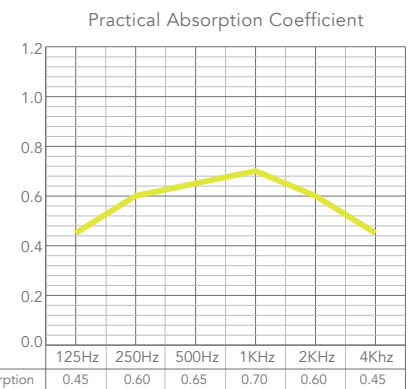

Sound absorption in accordance with ISO 354



SOUND ABSORPTION

Class C in accordance with EN ISO 11654. α_w : 0.60 in accordance with EN ISO 11654. Noise Reduction Coefficient (NRC): 0.65 in accordance with ASTM C 423-01.



HUMIDITY RESISTANCE

Suitable in conditions up to 90% relative humidity at 25°C.



CLEANING & HYGIENE

These tiles have an anti bacterial, self sterilising finish which can be cleaned regularly. Contact us for cleaning guidelines.



SOUND ATTENUATION

34dB Dnc,w in accordance with BS EN ISO 717-1.



PRODUCT WEIGHT

These tiles weight approximately 3.5kg per m².



ACCESSIBILITY

These tiles are easily demounted..



FIRE PERFORMANCE

Euroclass A2-s1, d0 in accordance with EN 13501-1.



TILE LOADING

These tiles are not designed to support the weight of any services. Please contact us for grid loading data.



ENVIRONMENTAL

These tiles are capable of being recycled, please contact us for full details.